



RAEGuard S

Permanently Installed Gas Detector



The RAEGuard S is a permanently installed gas detector for hydrocarbon combustible gases, carbon dioxide and a wide range of toxic gases. It is a flexible detector that provides both an analog (4-20mA) and digital (RS-485, ModBus RTU) output signal. The RAEGuard S uses a smart sensor that can be pre-calibrated offline. An explosion-proof stainless-steel enclosure and non-intrusive magnetic key operation make the RAEGuard S ideal for use in hazardous environments. The RAEGuard S is equipped with a local digital display and LEDs for viewing gas concentration and alarm conditions.

KEY FEATURES

Easy to Use

- Magnetically accessed keys for non-intrusive calibration
- Designed for easy access to sensor
- Local digital display with alarm indication

Flexible

- RS-485 digital communication in ModBus protocol
- Adjustable 4-20mA analog output
- Operation at 9 to 36VDC
- 2 programmable alarm relays

Durable

- Long-life sensor
- Explosion-proof stainless-steel enclosure

Advanced Technology

- Smart NDIR, Catalytic or Electrochemical sensors
- Offline calibration
- Quick response sensors

- **Stainless-steel enclosure**
- **Offline calibration**
- **Non-intrusive calibration**
- **Analog and digital communication**
- **Local display**

APPLICATIONS

- Waste water treatment plants
- Petroleum and natural gas fields
- Marine and off-shore oil wells
- Refineries and petrochemical plants
- Pulp and paper plants
- Chemical plants
- Power plants
- Steel mills



ATEX



RAEGuard S

Permanently Installed Gas Detector



SPECIFICATIONS

Sensor Specifications

Gas	Range	Resolution
Hydrogen Sulfide (H ₂ S)	0 to 300 ppm	1 ppm
Carbon Dioxide (CO ₂)	0 to 50,000 ppm	10 ppm
Methane (CH ₄)	0 to 100% LEL	1% LEL
Hydrocarbons (HC)	0 to 100% LEL	1% LEL
Carbon Monoxide (CO)	0 to 1000 ppm	1 ppm
Oxygen (O ₂)	0 to 30% VOL	0.1% VOL

*Other sensors: contact manufacturer

Detector Specifications


Size	6.6" L x 5.9" W x 4.3" H (16.8cm x 15cm x 10.9cm)
Weight	7.7 lbs (3.5 kg)
Detector	Protected, Off-line pre-calibrated, interchangeable smart NDIR sensor
Calibration	Two-point calibration
Accuracy	± 5% FS
Response Time (T90)	≤ 30 seconds to 90% of reading to span gas
Enclosure Rating	ATEX: Ex II 2 G Ex d II C T6 China Certification: Ex d II C T6
IP Rating	IP-65
Power	9 to 36VDC, max 60mA at 24V or 1.5W
Output	4-20mA, RS-485 ModBus RTU (Baud rate of 4.8, 9.6, or 19.2 Kb/s)
Sampling	Internal diffusion
Display	7-segment, 4-digit LCD (if the reading digits are more than 4, LCD will display "X.XEX" for X.X x 10x)
User Interface	4 color-coded alarm LEDs Magnetically accessed keys for non-intrusive calibration and adjustment
Operating Temperature	-40° F to 140° F (-40° C to 60° C)
Humidity	0 to 95% relative humidity (non-condensing)
Pressure	0.9 to 1.1 ATM
Dry Contacts	Max 30V, 2A, normally open (or normally closed), one for low and high alarm, and another for faults
Terminal	AWG24-12
Mounting	2 holes 5.25" (13.3cm) from center to center

*Specifications are subject to change

RAEGuard S Basic Kit

- RAEGuard S detector with smart sensor as specified
- Installation, operation and maintenance manual
- Magnetic key
- Calibration adapter

Installation Drawing

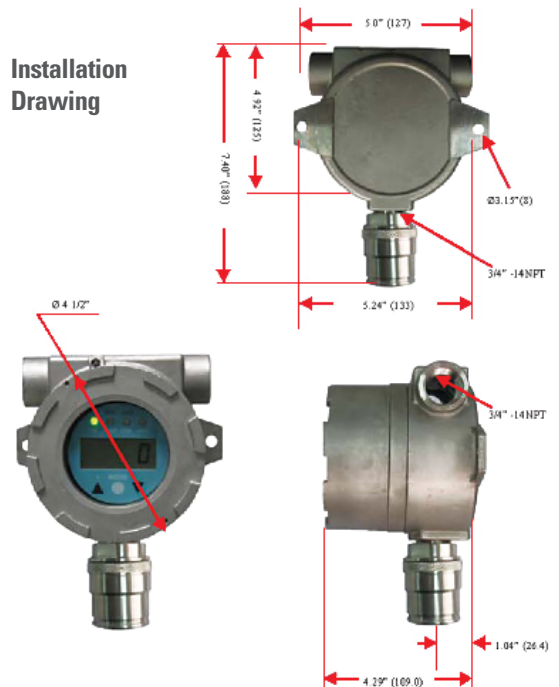

ORDERING INFORMATION

Part Numbers

Kit Description	Range	Part Number
RAEGuard S IR CO ₂ , FGM-1200S	0 to 50,000 ppm	036-0807-000
RAEGuard S IR LEL, FGM-1200S	0 to 100% LEL	036-0806-000
RAEGuard S Catalytic LEL, FGM-1100S	0 to 100% LEL	036-0805-E00
RAEGuard S EC CO, FGM-1300S	0 to 1000 ppm	036-0805-E20
RAEGuard S EC O ₂ , FGM-1300S	0 to 30% VOL	036-0805-E70
RAEGuard S EC H ₂ S, FGM-1300S	0 to 300 ppm	036-0805-E10

*Calibration adapter and adjustment magnet are included

CORPORATE HEADQUARTERS

RAE Systems by Honeywell

3775 North First Street
San Jose, CA 95134 USA
raesales@raesystems.com

DS-1050-03

WORLDWIDE SALES OFFICES

USA/Canada 1.877.723.2878
Europe +45.86.52.51.55
Middle East +00971.4.440.5949
China +86.10.5885.8788-3000
Asia Pacific +852.2669.0828

www.raesystems.com